





PRO-CASE FASCIA FIRE PROTECTION SYSTEM

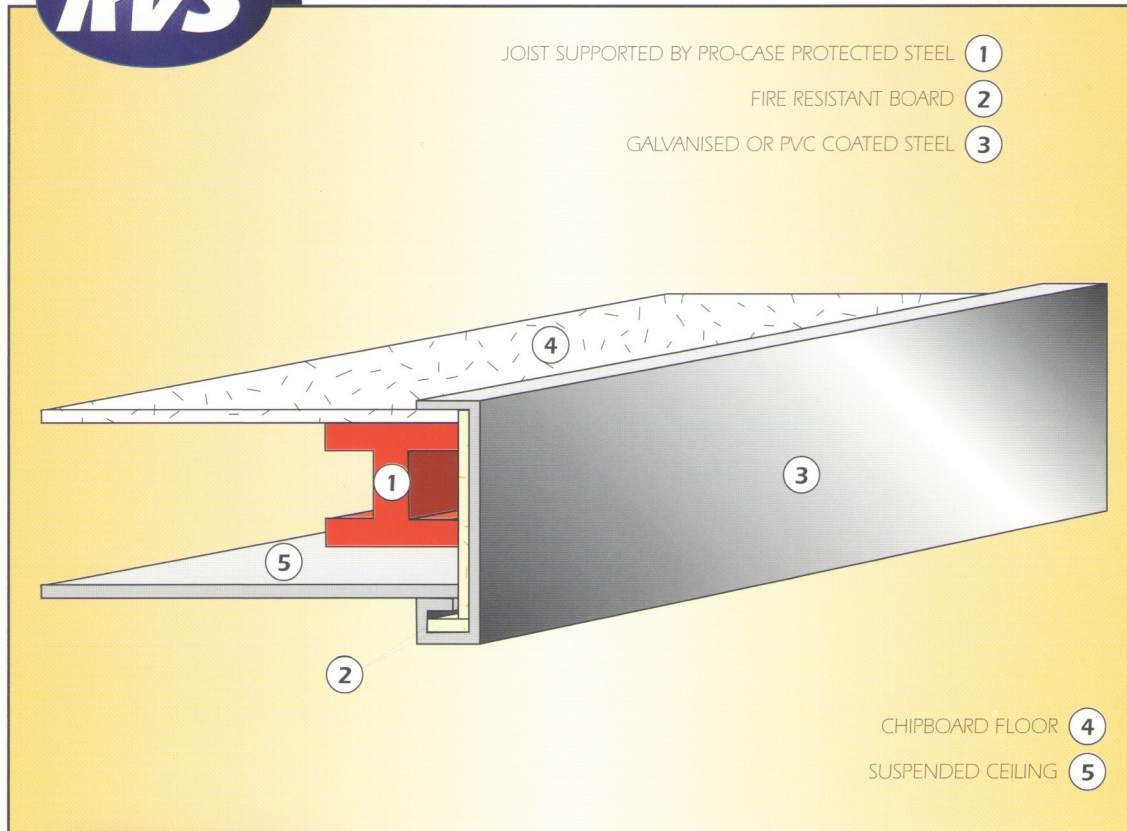

Fire Protection for Mezzanine Floor Edges. Replacement for Conventional Continuous Board Bulkhead. Pro-Case Fascia is a pre-formed, tailor made fire protection system for the protection of mezzanine floor edges against fire & is the perfect complement to our Pro-Case Column Casings. Pro-Case Fascia can afford up to 2 hours fire resistance. Tested WFRC C55165

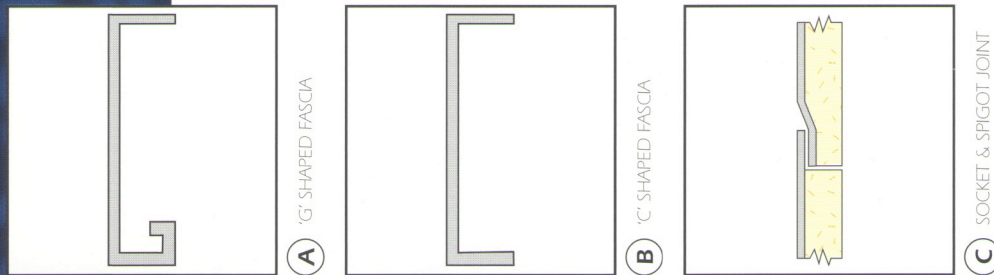

Suitable for Mezzanine Floor Edges

Up to 2 Hours Fire Resistance

Complements Pro-Case Fire Protection System

Wide Range of Finishes

Up To 4000mm Single length

APPEARANCE

Available in Galvanised Steel, Pre-Primed Steel suitable for decorating on site, PVC & PVF2 Colorcoat Steels to current British Steel ranges, Polyester Powder Coated Steel to BS or RAL colour ranges or Stainless Steel.

Other Finishes to suit special environments (Food Preparation, Computer Rooms etc).

All standard finishes are Class 1 surface spread of flame when tested to BS 476 Fire 1971 & Class 0 Building Regulations 1972.

All Pre-finished fascias supplied with stripable film for protection during installation & from other trades.

DIMENSIONS

Pro-Case Fascia is tailor-made to suit the mezzanine floor to be protected & can be of 'G' Shaped (standard) (fig. A) or 'C' Shaped (for areas where height is restricted) (fig. B).


The top flange of the Fascia is fixed directly onto mezzanine floor decking.

The suspended ceiling can then be struck off the lower flange or return. (Note: As

standard RVS measure the depth of "G" shaped fascia from the top of the flange to the upper face of the return. Should you require any other dimension please advise).

Pro-Case Fascia is available in a maximum single length of 4000mm. For greater lengths

a socket & spigot joint is employed to join lengths (fig. C). Maximum depth at this length

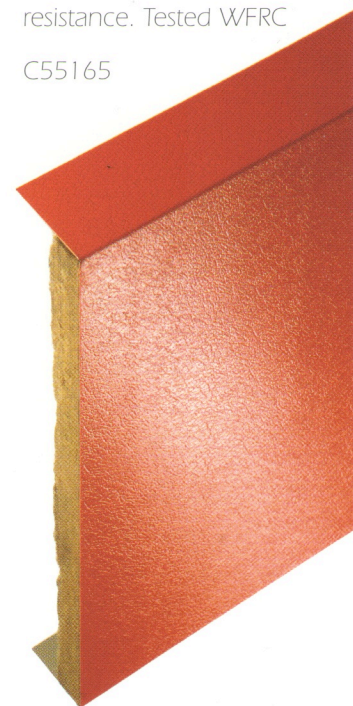

RV SYSTEMS LIMITED

Unit 14, The Wallows Industrial Estate,
 Wallows Road,
 Brierley Hill,
 West Midlands.
 DY5 1QB.

Telephone: 01298 483380